



Coil Heaters

FEATURES

- Sheath material: SS
- Standard sizes available with various cross section
- Various Watt Density options available
- Designed for even heat profile
- Precision fit on Hot Runner Nozzles
- Highly Non-corrosive

TECHNICAL DATA

- Sheath Temperature: 750°C Max
- Voltage Range: 24 to 250 volts
- Standard Wattage: 250W, 330W, 400W, 470W, 550W, 650W, 750W, 850W, 1000W, 1100W
- Connection Wires: 1000 mm Stranded Nickel wires with PTFE coating
- Available Cross Sections (in mm):
 - ⊕ Round: 2.9, 3.3, 3.8
 - ▣ Square: 3 x 3, 3.3 x 3.3
 - ▭ Flat: 1.8 x 3.2, 2.2 x 4.3, 2.5 x 4.0, 4.0 x 6.4

Tolerance on all dimensions ± 0.1 mm




READY STOCK COIL HEATERS WITH J TYPE THERMOCOUPLE (UNGROUND)


Available Ex Stock. Dispatched within 48 hours (for standard lengths only).

Caution: Once a heater is bent or coiled it is not advised to de-coil or re-bend the same.

DIMENSIONAL DATA	SPECS	TOLERANCE
ID	A	- 0.4 - 0.2
LENGTH	B	± 1 mm
OD	C	
COLD LENGTH	D	± 5 mm
CABLE LENGTH	E	± 25 mm
WATTS	W	± 10 %
VOLTS	v	
2 POWER CABLE		
2 THERMOCOUPLE	F	
1 GROUND (EARTHING)		

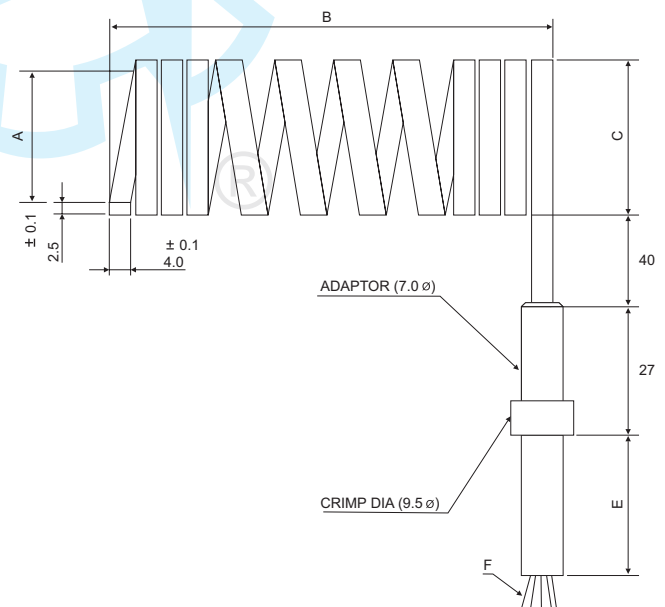

EXIT OPTIONS

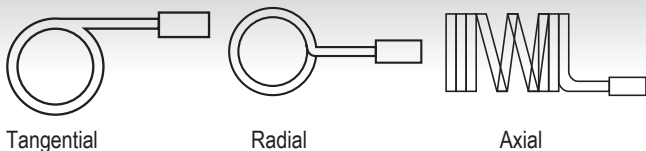

CABLE OPTIONS

